


SLINGS



WEBBING SLINGS

Specification:

- manufactured from 100% polyester fibre;
- according to EN 1492-1, with certificate of conformity;
- indication of working load limits (WLL): by colour, number of stripes and printing on sling and label.

Available:

- in any specified length, with flat or folded eyes or with steel terminals
- one way slings for pre-slung cargoes
- special pipeslings, up to 1200 mm wide, for lifting pipes
- supplied with special "ramshorn" steelplate fittings
- label printed with your company name or logo


POLYESTER SLEEVES to protect the slings from abrasive damage or cutting. Available in any length and width, movable or sewn to the webbing sling or round-sling. Alternatively we can supply the sling with a **webbing pad**.

WEBBING SLING TYPE	colour	stripes code	Safe working load				
			100%	200%	80%	140%	100%
PS030	violet	1	1000 daN	2000 daN	800 daN	1400 daN	1000 daN
PS060	green	2	2000 daN	4000 daN	1600 daN	2800 daN	2000 daN
PS090	yellow	3	3000 daN	6000 daN	2400 daN	4200 daN	3000 daN
PS120	gray	4	4000 daN	8000 daN	3200 daN	5600 daN	4000 daN
PS150	red	5	5000 daN	10000 daN	4000 daN	7000 daN	5000 daN
PS180	brown	6	6000 daN	12000 daN	4800 daN	8400 daN	6000 daN
PS240	blue	8	8000 daN	16000 daN	6400 daN	11200 daN	8000 daN
PS300	orange	10	10000 daN	20000 daN	8000 daN	14000 daN	10000 daN

The type number specifies the width of the sling (e.g. PS030 = 30 mm wide, etc.)
Larger capacity slings are delivered on request.


SLING TERMINALS

To avoid damaging the sling's eye, e.g. by a crane hook.

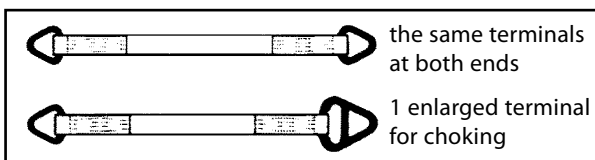

COMPONENTS

Rings, hooks and couplings

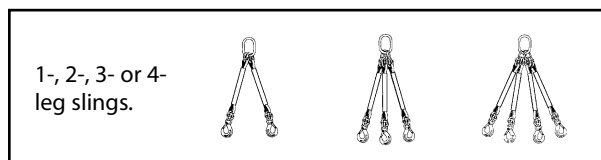

SLINGS



ROUNDSLINGS

Specification:

- load bearing core of endless polyester yarns, protected by a polyester, non load bearing, tubular sleeve;
- according to EN 1492-2, with certificate of conformity;
- indication of working load limits (WLL): by colour, number of stripes and printing on sling and label.

Available:

- in any specified length, with or without steel terminals
- label printed with your company name or logo

POLYESTER SLEEVES


To protect the slings from abrasive damage or cutting we advise the use of sleeves. Available in any length and width, movable or sewn to the webbing sling or round-sling.

ROUNDSLING TYPE	colour	stripes code	Safe working load				
			100%	200%	80%	140%	100%
LL10	violet	1	1000 daN	2000 daN	800 daN	1400 daN	1000 daN
LL20	green	2	2000 daN	4000 daN	1600 daN	2800 daN	2000 daN
LL30	yellow	3	3000 daN	6000 daN	2400 daN	4200 daN	3000 daN
LL40	grey	4	4000 daN	8000 daN	3200 daN	5600 daN	4000 daN
LL50	red	5	5000 daN	10000 daN	4000 daN	7000 daN	5000 daN
LL60	brown	6	6000 daN	12000 daN	4800 daN	8400 daN	6000 daN
LL80	blue	8	8000 daN	16000 daN	6400 daN	11200 daN	8000 daN
LL100	orange	10	10000 daN	20000 daN	8000 daN	14000 daN	10000 daN

Roundslings with a greater circumference than 10 metres(EWL 5m) and also higher lifting capacities are available on request.


COMPONENTS

Rings, hooks and couplings

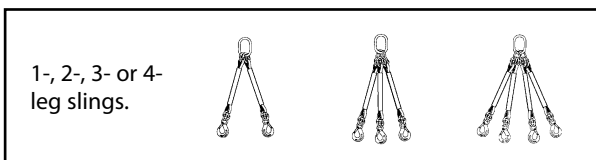

1-, 2-, 3- or 4- leg slings.

SLINGS

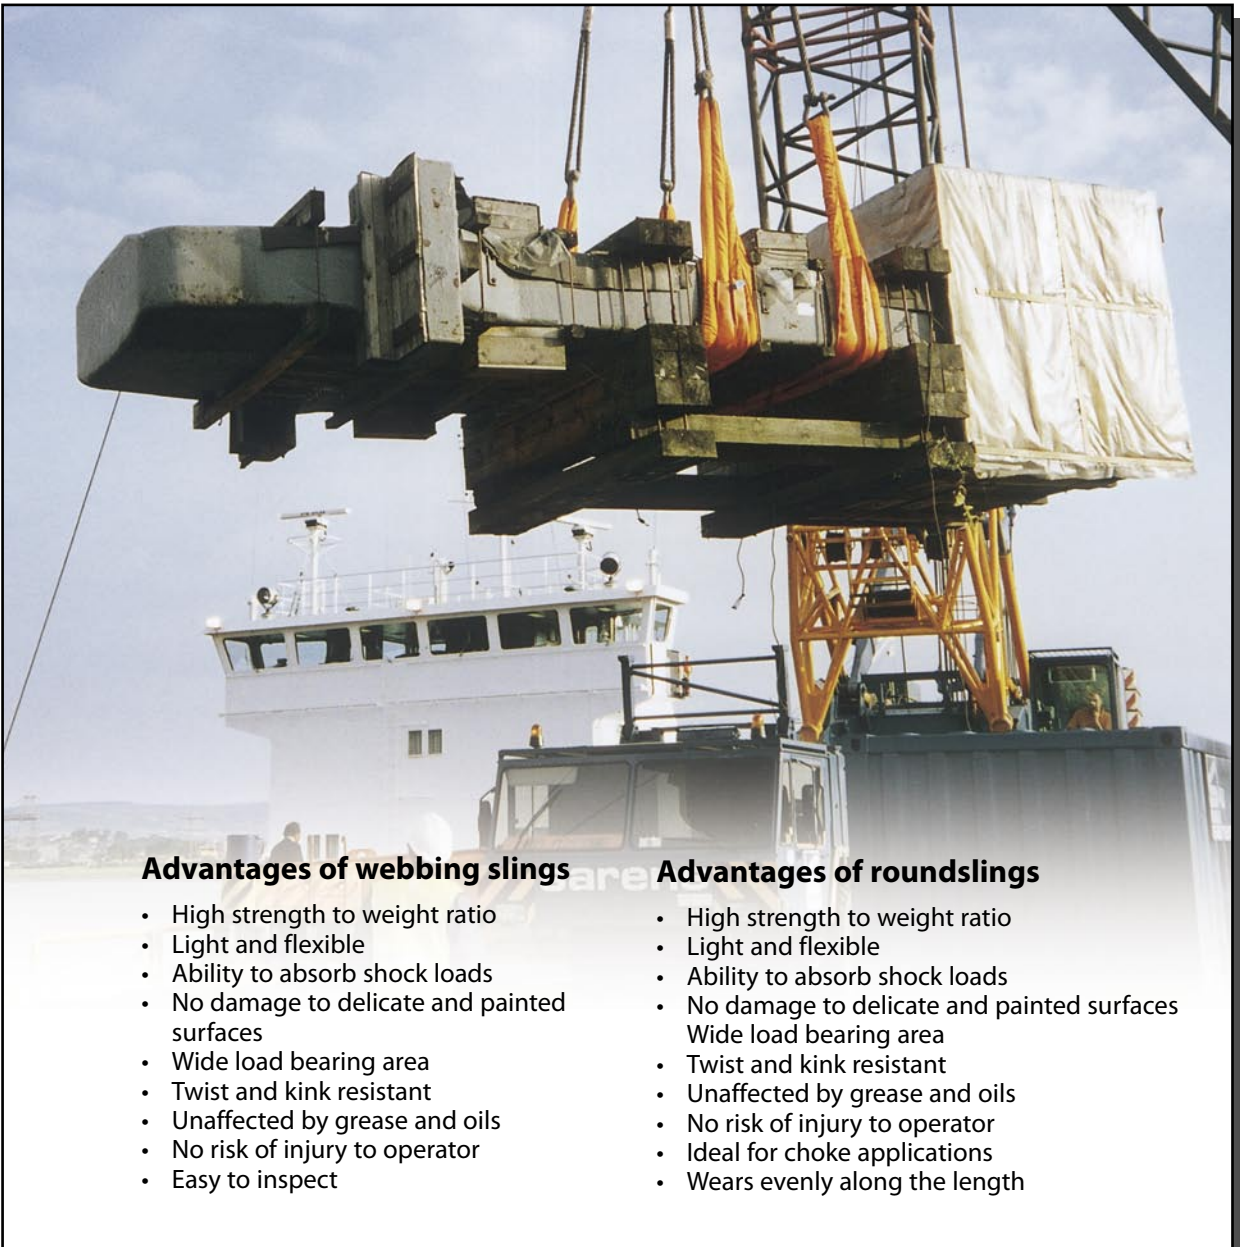

Advantages of webbing slings

- High strength to weight ratio
- Light and flexible
- Ability to absorb shock loads
- No damage to delicate and painted surfaces
- Wide load bearing area
- Twist and kink resistant
- Unaffected by grease and oils
- No risk of injury to operator
- Easy to inspect

Advantages of roundslings

- High strength to weight ratio
- Light and flexible
- Ability to absorb shock loads
- No damage to delicate and painted surfaces
- Wide load bearing area
- Twist and kink resistant
- Unaffected by grease and oils
- No risk of injury to operator
- Ideal for choke applications
- Wears evenly along the length

HINTS FOR SAFE LIFTING

1. A sling should be examined for defects prior to the use and to ensure that its identification and specification are correct.
2. Slings should not be overloaded.
3. Slings should never be knotted or twisted.
4. Slings should be protected from sharp edges, friction and abrasion, whether from the load or from the lifting appliance.
5. The polyester material from which LOAD-LOK slings are manufactured has selected resistance to chemicals. Advice should always be sought if exposure to chemicals is likely.
6. Polyester slings are suitable for use in the temperature range of -40° C to 100° C. This varies in a chemical environment, in which case the advice of LOAD-LOK should be sought.
7. Avoid snatch or shock loading.
8. Never repair a damaged sling, always consult your supplier.

